


Si te “Upgrade” nje RouterBoard Mikrotik

Me ane te ketij udhezuesi do t’iu shpjegojme se si te mund te beni Upgrade te nje RouterBoard-i MikroTik ne versionin me te fundit (atehere kur licenca jua lejon).

1. Fillimisht kontrolloni tipin e RouterBoard-it qe zoteroni. Hapni Winbox-in dhe lexoni tek fusha e titullit te kesaj dritareje (titlebar) tipin e tij



2. Hapni ne web, faqen e MikroTik-ut, www.mikrotik.com
Klikoni tek download

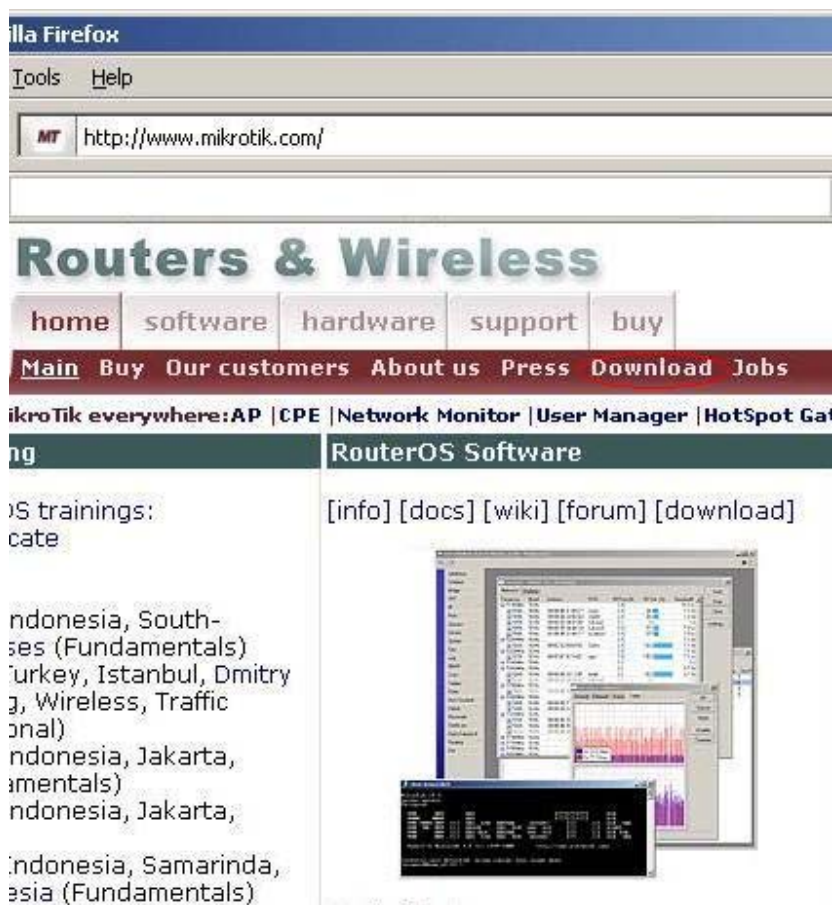

3. Zgjidhni modelin e routerboard-it tuaj (ne rastin tone nje RB333)



The screenshot shows the Mikrotik RouterOS Download page. At the top left is the Mikrotik logo with the tagline "ROUTING THE WORLD" and the website "www.mikrotik.com". The main heading is "Routers & Wireless". Below this are navigation tabs for "home", "software", "hardware", and "support". A red banner contains the text "Support Documentation Training Consultants". Below the banner, it says "MikroTik everywhere: AP | CPE | Network Monitor | User Ma". The main content area is titled "RouterOS Download" and has a dropdown menu for "Please choose download site:" set to "Sweden". Below this is a "Select system type:" dropdown menu. The menu is open, showing options: "All Systems", "All Systems", "RB Crossroads", "RB100 series", "RB200 series", "RB300 series" (circled in red), "RB400 series", "RB500 series", "RB600 series", "RB1000 series", "Intel/AMD PC", and "Other X86 platform".

4. Pas kesaj zgjidhni versionin e software-it qe doni te shkarkoni



The screenshot shows the Mikrotik RouterOS Download page. At the top left is the Mikrotik logo with the tagline "ROUTING THE WORLD" and the website "www.mikrotik.com". The main heading is "Routers & Wireless". Below this are navigation tabs for "home", "software", "hardware", and "support". A red banner contains the text "Support Documentation Training Consultants". Below the banner, it says "MikroTik everywhere: AP | CPE | Network Monitor | User M". The main content area is titled "RouterOS Download" and has a dropdown menu for "Please choose download site:" set to "Sweden". Below this is a "Select system type:" dropdown menu set to "RB300 series". Below that is a "Select software type:" dropdown menu. The menu is open, showing options: "- select version -", "- select version -", "All versions", "Development", "Stable" (highlighted in blue), "Previous Stable", and "Legacy".

5. Se fundmi klikoni mbi nje nga link-et e download-it, ne rastin tone po zgjedhim “All packages”. File e zipuar qe po shkarkoni ruajeni ne nje vend te pershtatshem per ju, p.sh. ne desktop

ROUTING THE WORLD
MikroTik
www.mikrotik.com

Routers & Wireless

home software hardware support

Support Documentation Training Consultant

MikroTik everywhere: AP | CPE | Network Monitor | User M.

RouterOS Download

Please choose download site: **Sweden**


Select system type:
RB300 series

Select software type:
Stable



RouterOS 3.17

- All files (requires a Torrent client)
- Combined package (http)
- **All packages** (includes optional packages; [view co](#))
- Routing beta package (http)
- MPLS beta package (http)
- Wireless beta package (http)



6. Mbase keni shkarkuar versionin e fundit te software-it MikroTik RouterOS te pershtatshem per RouterBoard-in tuaj, rikthehemi tek Winbox-i dhe futemi ne router. Aty, ne menune ne krah te majte zgjidhni “Files”. Do ju hapet nje dritare me emrin “File List”. Ne brendesi te kesaj dritareje mund te kete ose jo file te ndryshem, kjo ne varesi te konfigurimit

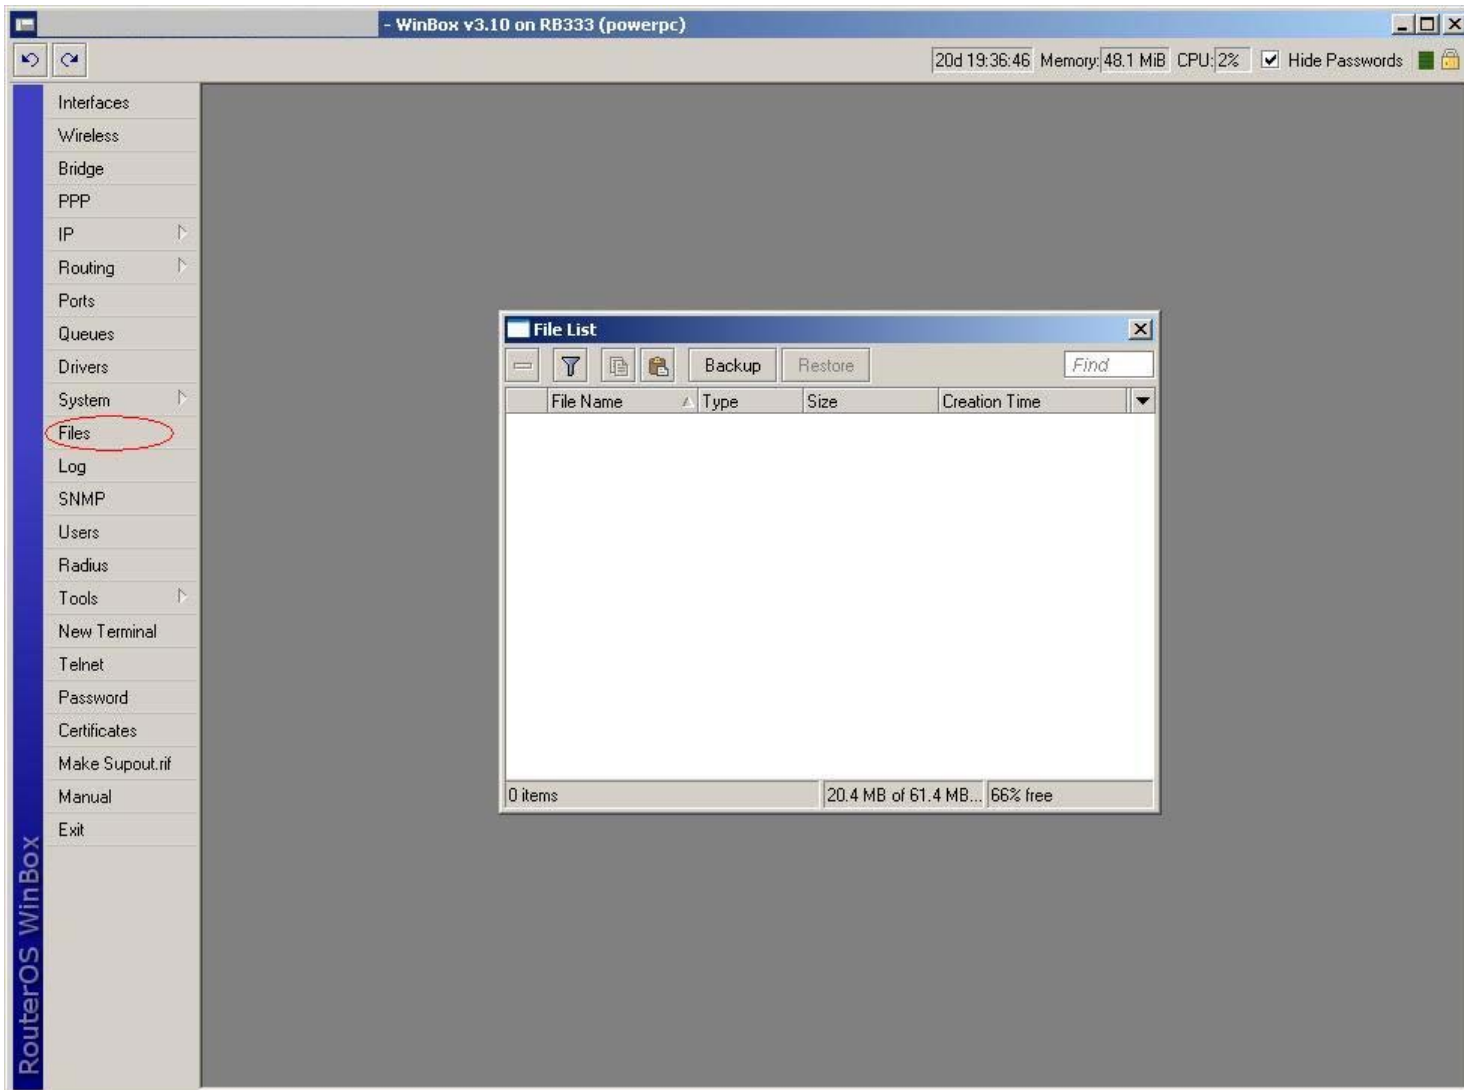

- Ekstraktioni nga file qe shkarkuat nga faqja e MikroTik duke unzip-uar, te gjithe filet qe gjenden brenda tij ne nje folder te ri. Me pas zgjidhini te gjithe keta file dhe duke i terhequr hidhini ne dritaren “File List” brenda Winbox-it qe hapet pak me pare

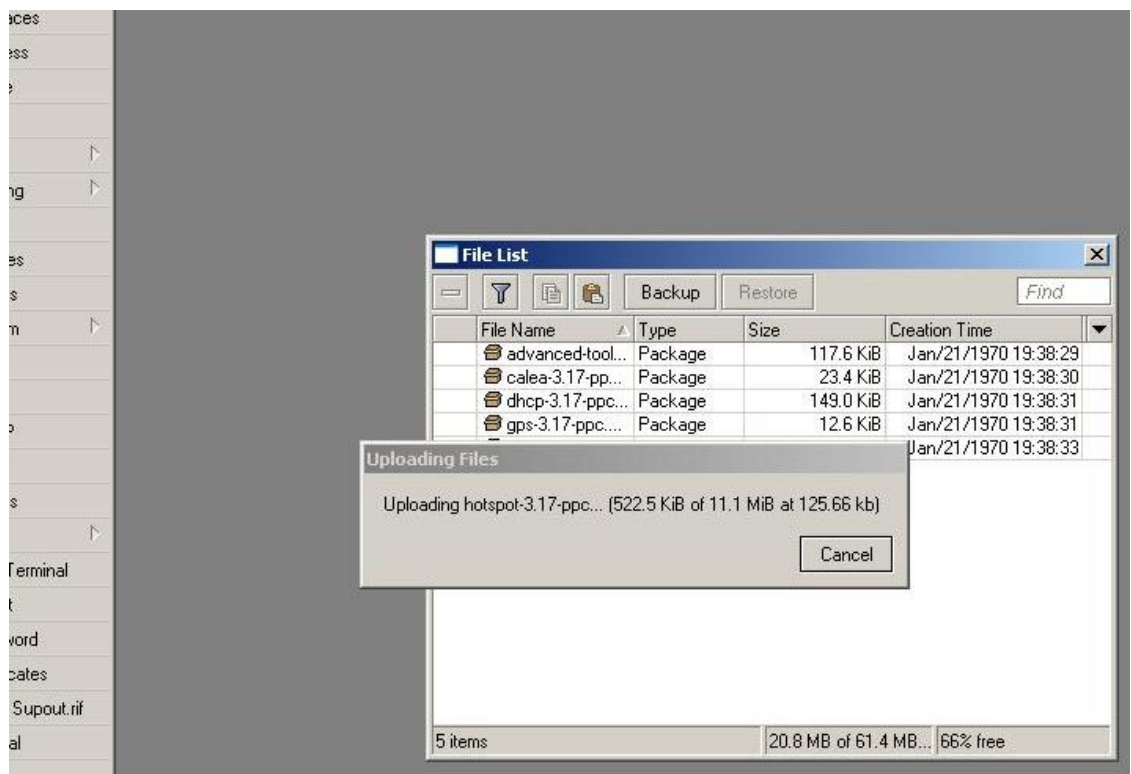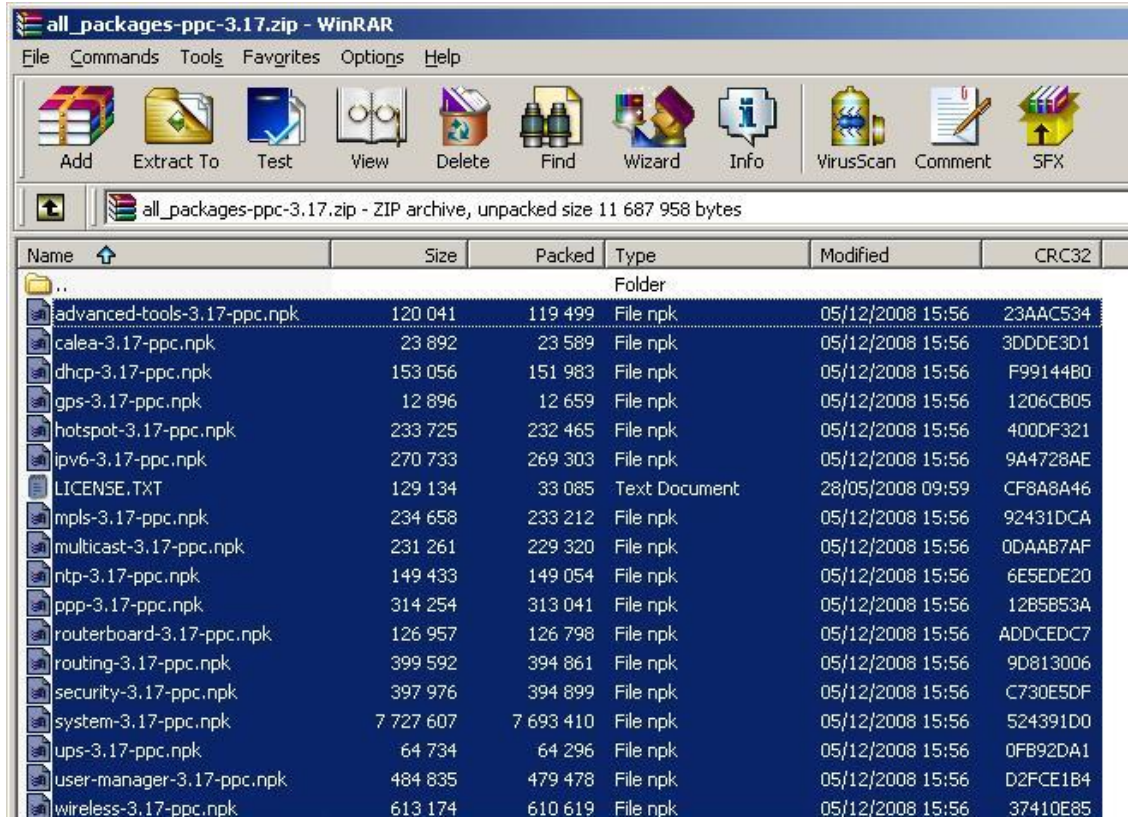


8. Prisni deri sa filet te upload-ohen plotesisht. Kujdes, ne rast te shkeputjes se Routerit gjate upload-it ripesiritni hapin e mesiperm. Kur tere filet te jene kaluar me sukses ne router, atehere beni nje reboot te routerit

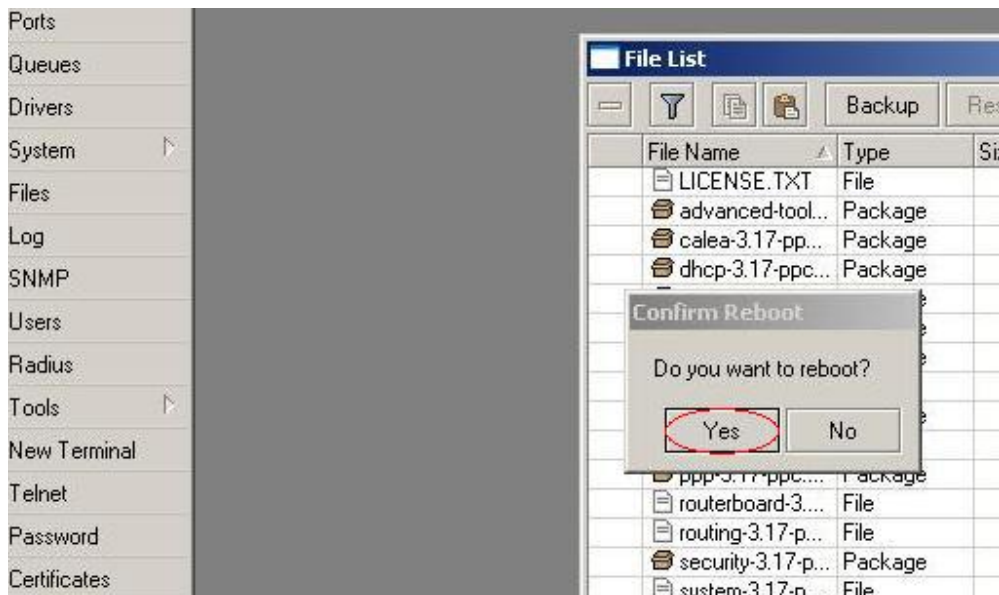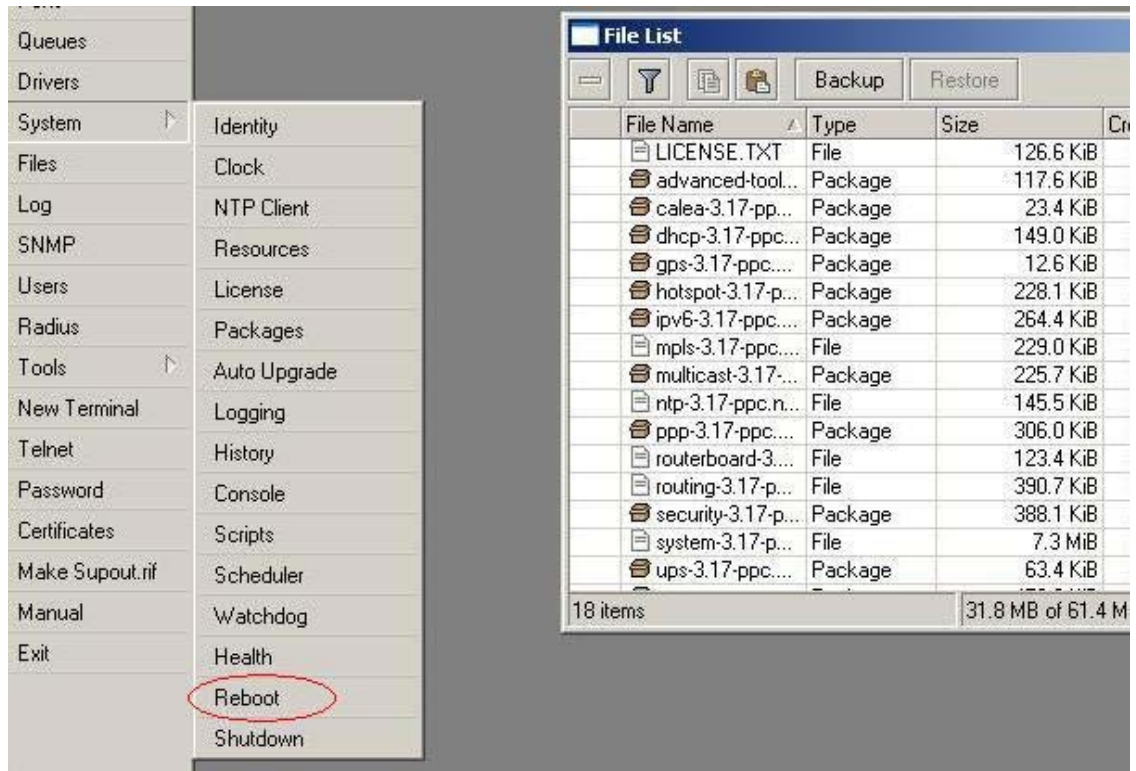

9. Prisni pak minuta pas reboot-it te routerit, kohe e cila nevojitet per te instaluar versionin e ri te software-it. Pas kesaj kur te hapni perseri Winbox-in do vini re upgrade-in e suksesshem te versionit, te pasqyruar ne fushen e titullit te dritares.

Hapi i fundit i upgrade-it te routerit eshte ai per te upgrade-uar firmware-in. Per kete duhet te punoni me telnet nepermjet Winbox-it

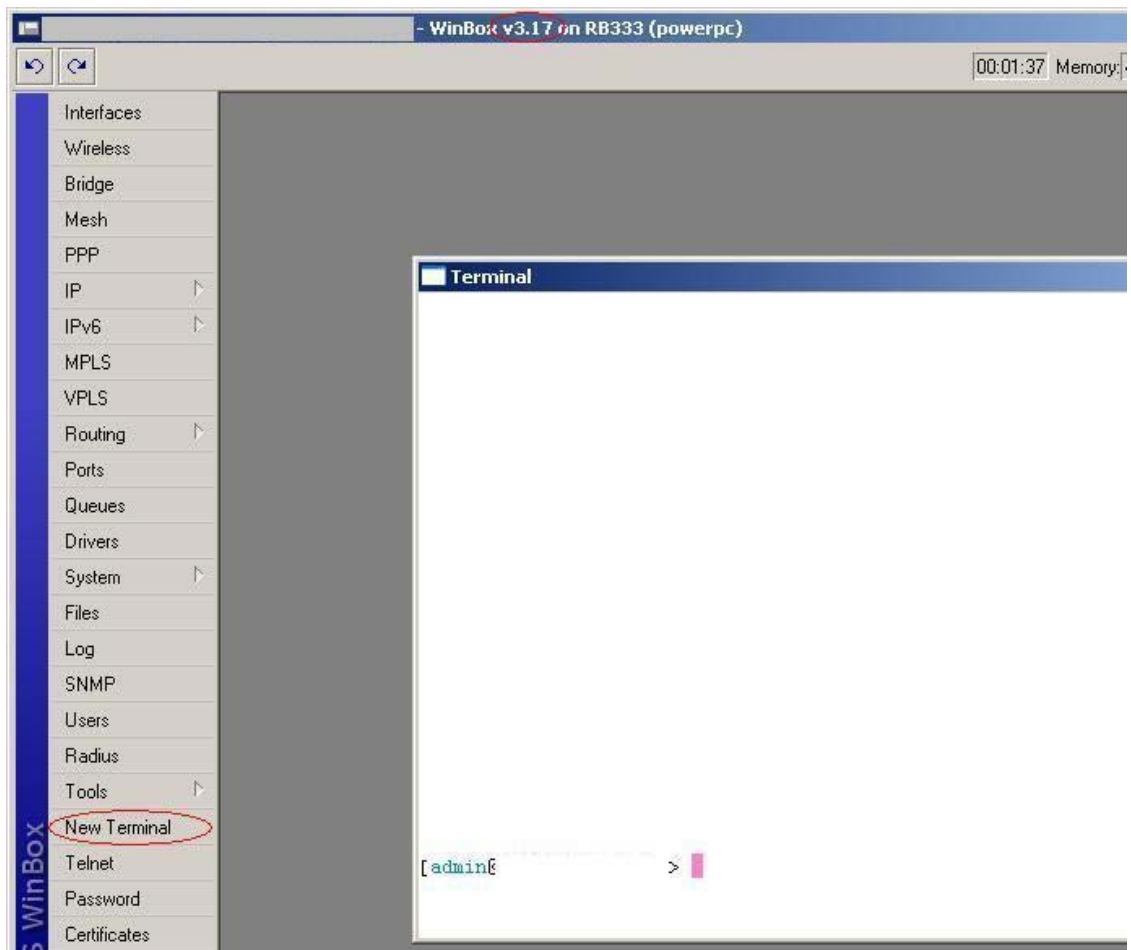

10. Kur jeni brenda terminalit shtypni me kujdes si me poshte:

`admin@ >system routerboard` pas ketyre shtyp tastin Enter

`admin@ /system routerboard> print` shtyp perseri tastin Enter

routerboard: yes

model: "333"

serial-number: xxxxxxxxxxxx


current-firmware: "2.12"

upgrade-firmware: "2.18"

Vini re se ndryshimin mes "upgrade-firmware" dhe "current-firmware", gje qe tregon se firmware nuk eshte upgrade-uar ende. Pas komandes "print" vazhdoni si me poshte:

`admin@ /system routerboard> upgrade` shtyp tastin Enter. Pyetjes nese doni

te upgrade-oni versionin apo jo, pergjigjuni me “Yes” duke shtypur tastin “y”. Pas kesaj do merrni nje pergjigje se upgrade u krye me sukses dhe se per te perfunduar duhet te reboot-oni paisjen. Beni edhe nje reboot te fundit te Router-it i cili pas kesaj eshte i upgraduar ne versionin me te fundit:

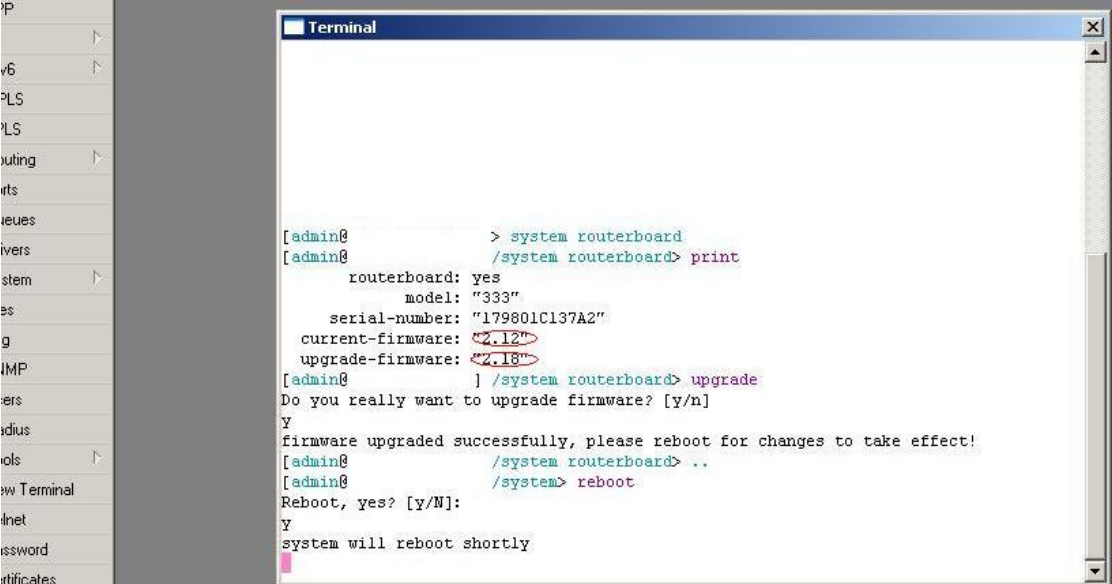

```
[admin@ > system routerboard
[admin@ /system routerboard> print
routerboard: yes
model: "333"
serial-number: "179801C137A2"
current-firmware: "2.12"
upgrade-firmware: "2.18"
[admin@ ] /system routerboard> upgrade
Do you really want to upgrade firmware? [y/n]
Y
firmware upgraded successfully, please reboot for changes to take effect!
[admin@ /system routerboard> ..
[admin@ /system> reboot
Reboot, yes? [y/N]:
Y
system will reboot shortly
```